



TouchKiosk™

What is TouchKiosk™ ?

Sirius' Touch Screens provide a **unique Touch Screen solution** - not only is the LCD display "touch enabled", but also an 'off-screen' touchable area, called a Panel. This off-screen area, or Panel, enables the user to utilize key icons, navigation keys, cross-selling buttons, and short-cuts to content, around the LCD display and make these available to the customer at all times.

Standard LCD Flat Panel Displays are integrated into the units, and also become Touch Screens. The LCD's slim dimensions means Sirius' Touch Screens can be easily integrated into a number of business solutions e.g. Kiosks, Shop Windows, Display Cabinets...- the list is endless!



TouchKiosk™




Features:


- Touch enabled glass.
- Optical imaging.
- 600 x 400mm (27" Touch Screen) size.
- Turns a standard LCD into a Touch Screen.
- Includes virtual keyboard.
- Surrounding 'panel' can provide touch icons for navigation, content short-cuts, specials and promotions.
- Any Touch Stylus can be used - finger, gloved hand, hard or soft stylus.
- Light touch – no touch pressure is required.
Actual touch registers up to 1mm (0.04") before the physical touch reaches on the Touch Surface.
- Scratch resistant:
Scratches on the Touch Surface glass will not affect the Touch Screen operation. In addition, the Touch Surface is tempered glass and will resist scratching.

Specification:


Physical Dimensions (with Bezel)	
• Max. External:	650mm x 450mm (24" x 16" approx.)
• Touchable Area:	591 x 371 mm (23.4" x 14.7" approx.)
• Depth:	100mm (4")
Frame/Bezel Colour:	Silver
Daylight Compensation Sensor:	Available
Operating Systems Supported:	Windows XP™ Windows 2000™
Touch Type:	Optical Imaging - no overlays, 100% image clarity
Touch Per Second:	40 touches per second
Touch Stylus:	Finger, gloved hand, hard or soft stylus
Operating Environment:	
• Temperature:	0°C - 60°C - depending on the Monitor used.
• Humidity:	0% - 90% non-condensating
Power:	20W
• Usage:	Universal voltage
Mounting Requirements:	As per Customer Requirements
Warranty:	12 months
Optional Modifications:	Artwork, Mounting Type e.g. Kiosk, Shop Windows, etc.
Interfaces:	Serial - 9 Pin D-connection. Multiple serial connection speeds supported - Baud rate 9600 and 115200.
Control Type:	OSD
Drag Response Time:	From sleep mode - approx. 100 milliseconds Normal - approx. 50 milliseconds
Resolution:	1024 x 1024
Touch Resolution:	Maximum number of addressable coordinates generated by the controller 8000 x 8000.
Touch Screen Weight:	Touch Screen Weight without Monitor approx. 8.2kg (18lb) Total Weight with Monitor approx. 16kg (35.2lb)
Software:	Sirius TouchStarter™ Sirius PanelDesigner™
Component List:	Touch Screen Back Panel VGA Cable Serial Cable (up to 3 metres long) Power Cables x 2

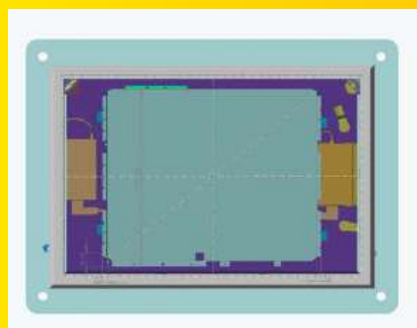

Front Perspective

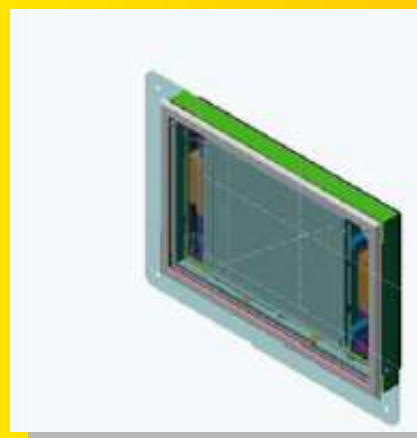

Isometric Perspective

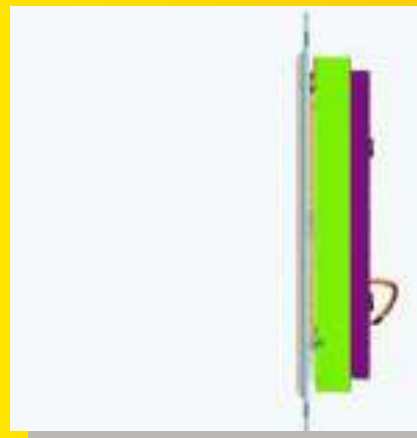

Side Perspective

Want to know more about our solution
Please call **(852) 2951 7336**
or E-mail us at sales@siriushk.com

SIRIUS INTERNATIONAL (HONG KONG) LIMITED
16/F, Futura Plaza, 111 How Ming Street,
Kwun Tong, Kowloon, Hong Kong.
Tel: (852) 2749 9825 Fax: (852) 2398 7605
Email: info@siriushk.com
Website: www.siriushk.com